

DEVELOPMENT SERVICES
ENGINEERING DIVISION
156 S. BROADWAY, SUITE 150
TURLOCK, CA 95380

PHONE: (209) 668-5520
FAX: (209) 668-5563
TDD: (800) 735-2929
engineering@turlock.ca.us

Date: 05/09/18

City Project No.: 18-28

Addendum No.: 1

Plan holders:

The following changes and notations shall be made to the project plans and specifications:

Plans:

- 1. Replace sheets 02 – 06 with the revised plan sheet (attached)**
Updates to slurry seal quantities


Bidder's Form:

- 1. Replace existing Bidder's Form with revised form (attached)**
Update to line item 5

If you have any questions, please call me at (209) 668-5428 or email at ahutchings@turlock.ca.us.

Sincerely,

Adam Hutchings, PE
Associate Civil Engineer

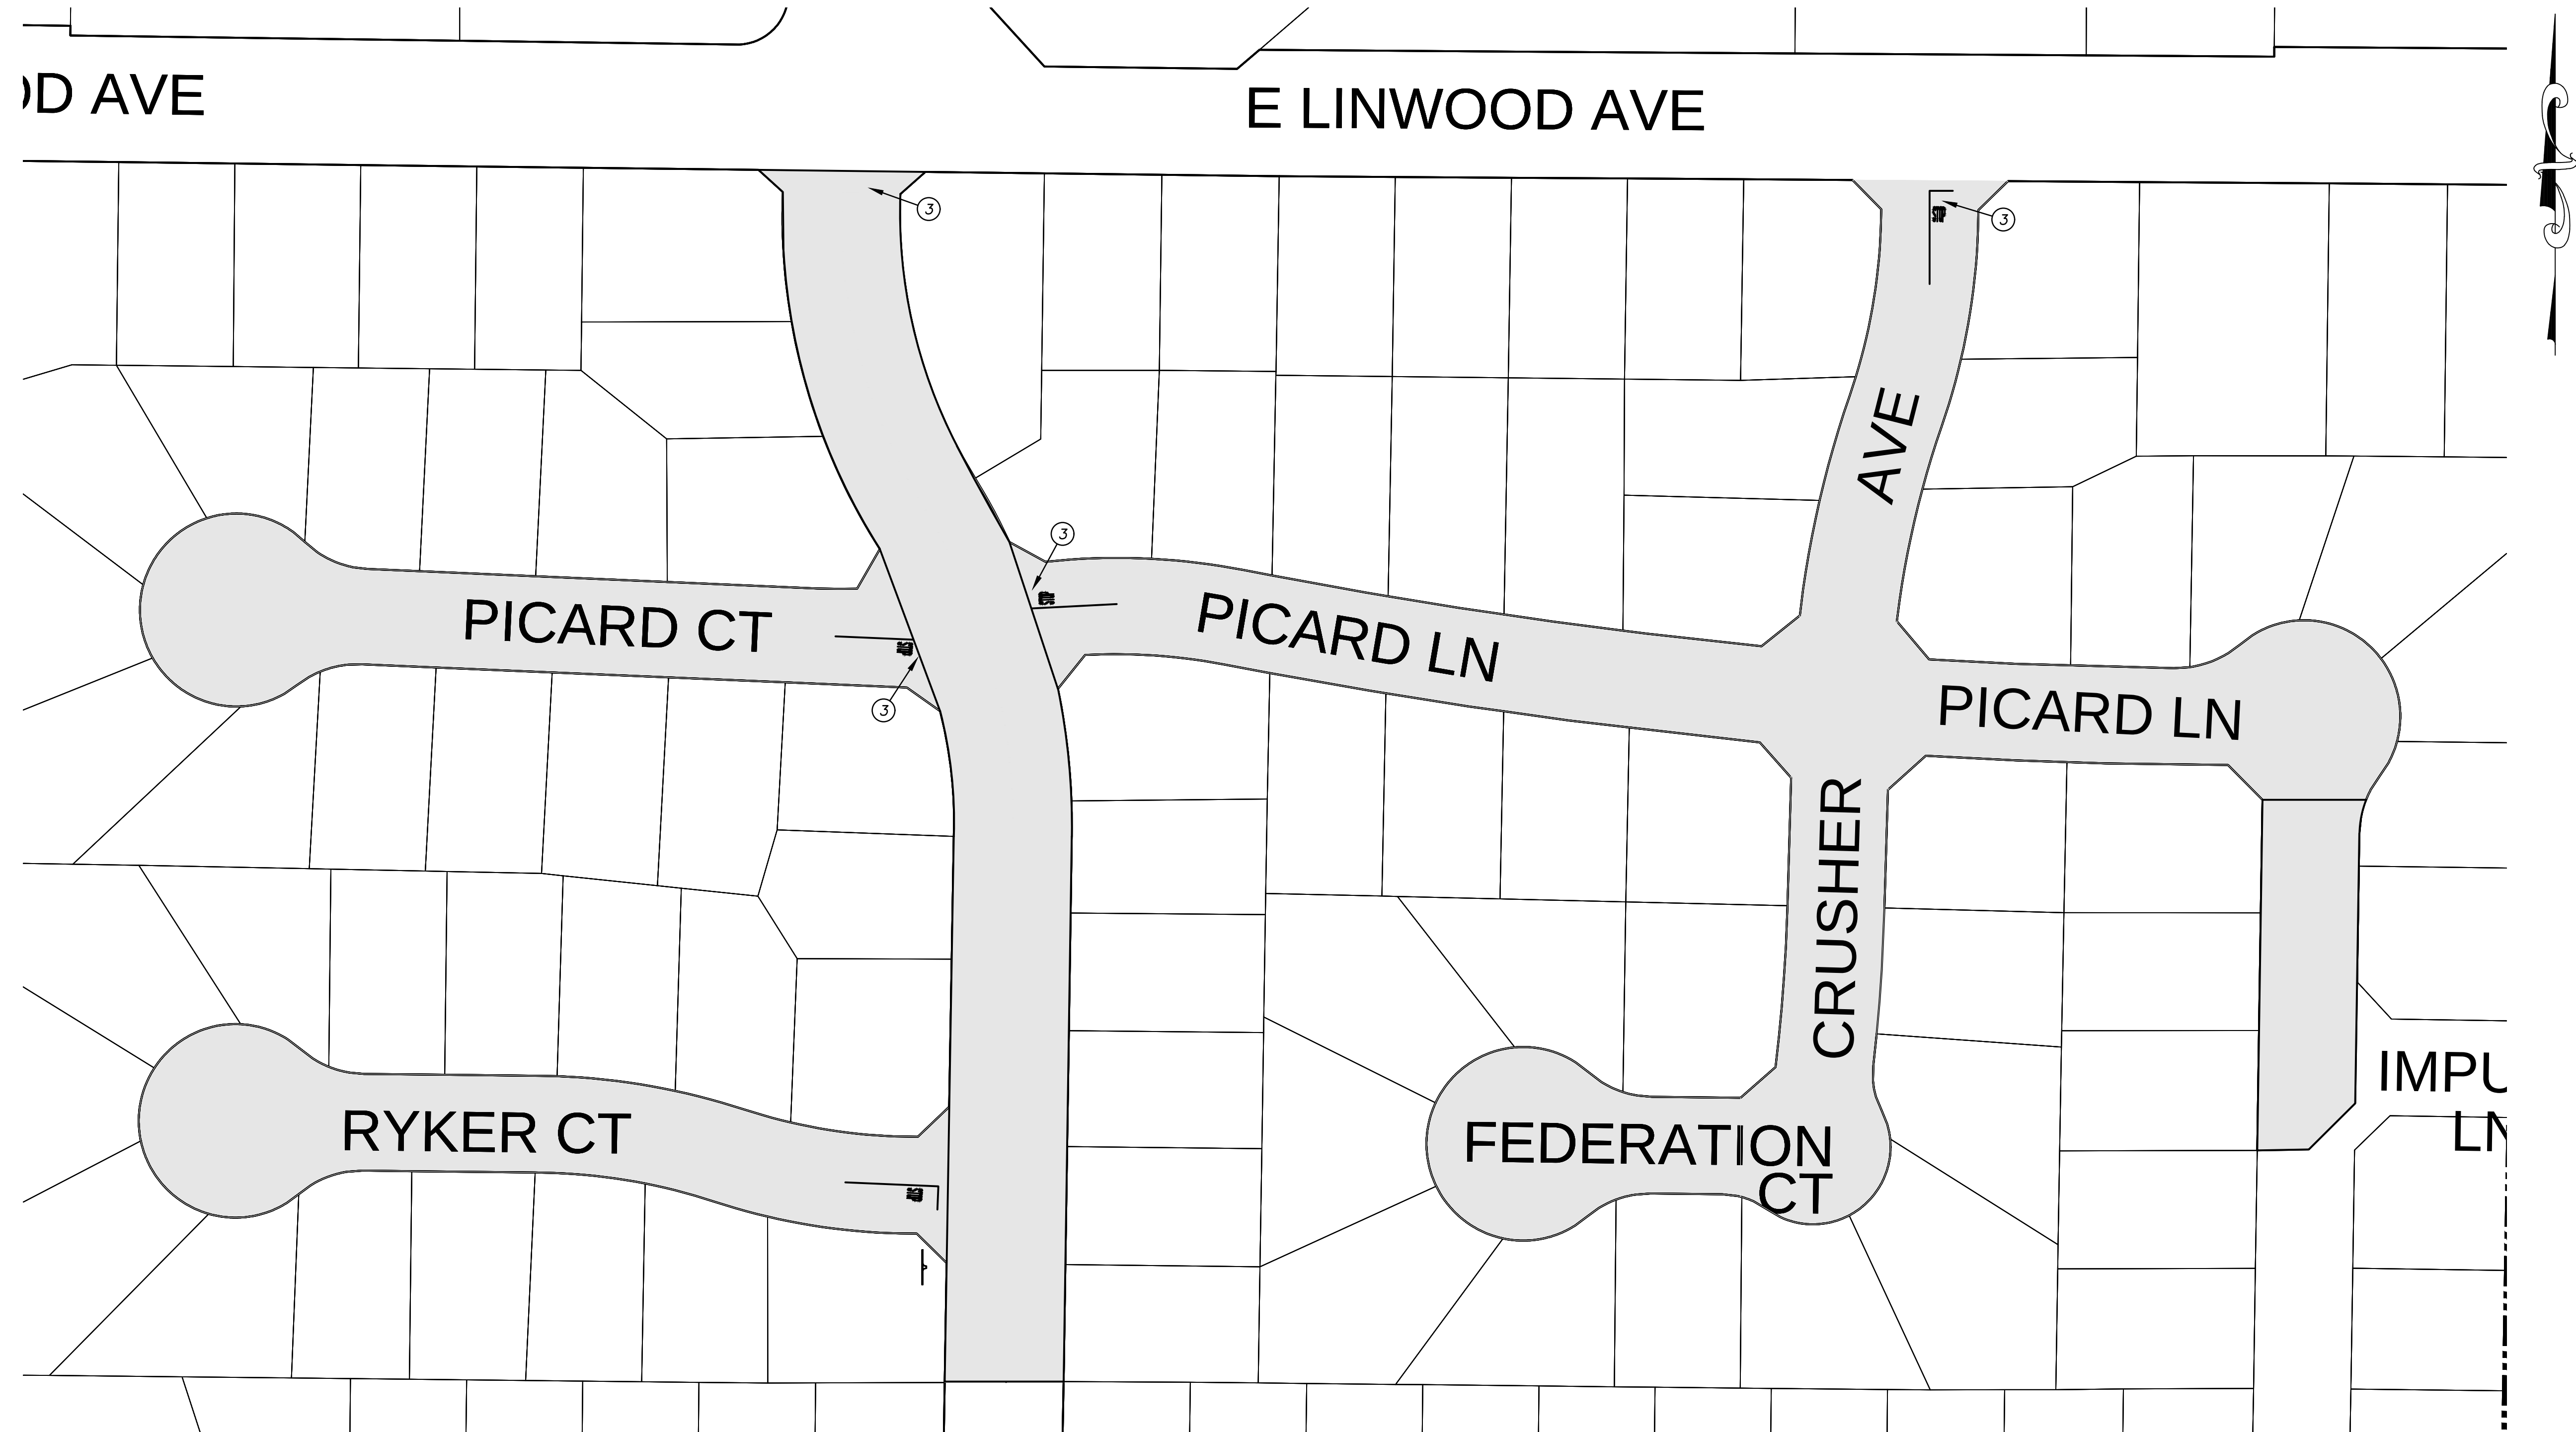

NOTES:

1. CONTRACTOR TO MATCH PROPOSED SLURRY SEAL LIMITS TO EXISTING SLURRY SEAL LIMITS. SHADED AREAS TO BE SEALED ARE DIAGRAMMATIC ONLY. SLURRY SEAL SHALL BE PLACED BETWEEN THE LIP OF GUTTERS, ENTIRE CUL-DE-SAC AND SHALL END AT CURB RETURNS, UNLESS OTHERWISE NOTED.
2. CONTRACTOR TO INSTALL BLUE FIRE HYDRANT PAVEMENT MARKERS (TYPE BB) PER CITY STANDARDS, DWG. NO. W-3
3. STRIPING AND PAVEMENT MARKINGS SHALL BE PER THE CURRENT EDITION OF THE STATE OF CALIFORNIA, DEPARTMENT OF TRANSPORTATION STANDARD PLANS.

LIMIT LINE (STOP LINE)(1'-0") AND "STOP" (A=22 S.F.) PAVEMENT MARKING WORD SHALL BE PLACED PER DETAIL, SEE SHEET 03.

TOTAL QUANTITIES

STREET NAME	SLURRY SEAL (S.Y.)	STOP BAR & LEGEND	DETAIL 23 (L.F.)	TYPE BB MARKERS	SIGN R1-1
5TH STREET	4,359	1	608	1	0
RYKER CT.	2,696	1	48	1	1
FEDERATION CT.	1,238	0	0	1	0
PICARD CT.	2,555	1	48	1	0
PICARD LN.	4,022	1	48	2	0
CRUSHER AVE.	3,189	1	48	2	0
WARP DR.	975	0	0	1	0
TOTAL	19,035	5	800	9	1

REVISIONS

REV NO.	REV DATE	BY	DESCRIPTION
1	5/8/18	AH	UPDATED SLURRY SEAL QUANTITIES



NOTE:
ALL REFERENCES AND WRITTEN DIMENSIONS SHALL SUPERCEDE ALL SCALED DISTANCES AND SHALL BE VERIFIED IN THE FIELD. ANY DISCREPANCY SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER PRIOR TO THE COMMENCEMENT OF WORK.

NATHAN B. BRAY, P.E.
INTERIM DEVELOPMENT SERVICES
DIRECTOR/CITY ENGINEER
4-19-18
PLANS APPROVAL DATE



DATE: _____



CITY OF TURLOCK
DEVELOPMENT SERVICES
ENGINEERING DIVISION
156 S. BROADWAY, STE 150
(209) 668-5520

CONSTRUCTION PLAN 1
CAPITAL PROJECT NO. 18-28
2018 SB-1 ROAD MAINTENANCE
AND REHABILITATION SLURRY SEAL

VERIFY SCALE
BAR IS 1" ON ORIGINAL DRAWING
0 1/4" 3/4" 1"
1/2"
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

DRAWN BY: AZ
REV. BY: AH
CH. BY: NB
DATE: MARCH, 2018
SCALE: NONE
18-28 BASE.dwg

SHEET
02
OF 06



TOTAL QUANTITIES


STREET NAME	SLURRY SEAL (S.Y.)	STOP BAR & LEGEND	DETAIL 23 (L.F.)	TYPE BB MARKERS	SIGN R1-1
SHADOW PARK DR.	8,019	1	48	4	0
VISCOUNT CT.	1,449	0	0	1	0
NOBLE LN.	7,061	1	48	4	0
VICTORIA CT.	2,636	0	0	1	0
ROYAL WOOD LN.	5,067	0	0	1	0
TOTAL	24,233	2	96	11	0



NOTES:

- CONTRACTOR TO MATCH PROPOSED SLURRY SEAL LIMITS TO EXISTING SLURRY SEAL LIMITS. SHADED AREAS TO BE SEALED ARE DIAGRAMMATIC ONLY. SLURRY SEAL SHALL BE PLACED BETWEEN THE LIP OF GUTTERS, ENTIRE CUL-DE-SAC AND SHALL END AT CURB RETURNS, UNLESS OTHERWISE NOTED.
- CONTRACTOR TO INSTALL BLUE FIRE HYDRANT PAVEMENT MARKERS (TYPE BB) PER CITY STANDARDS, DWG. NO. W-3
- STRIPING AND PAVEMENT MARKINGS SHALL BE PER THE CURRENT EDITION OF THE STATE OF CALIFORNIA, DEPARTMENT OF TRANSPORTATION STANDARD PLANS.

LIMIT LINE (STOP LINE)(1'-0") AND "STOP" (A=22 S.F.) PAVEMENT MARKING WORD SHALL BE PLACED PER DETAIL, SEE SHEET 03.

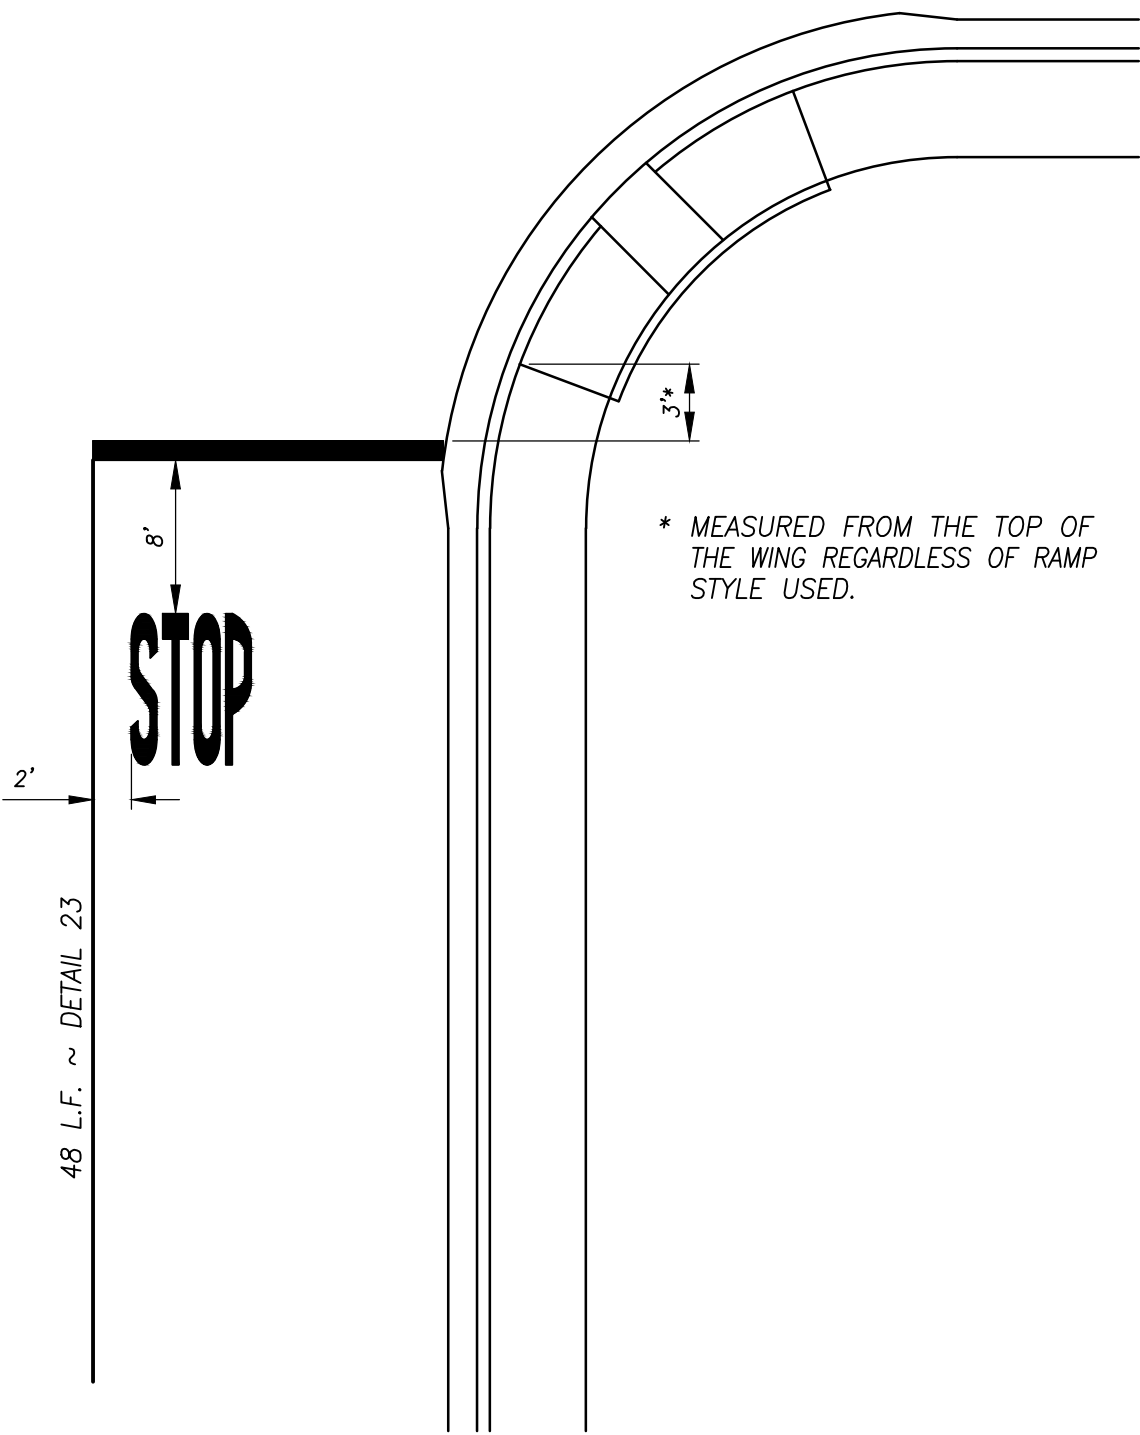

STOP BAR AND LEGEND DETAIL

NO SCALE

REVISIONS

REV NO.	REV DATE	BY	DESCRIPTION
1	5/8/18	AH	UPDATED SLURRY SEAL QUANTITIES



NOTE:
ALL REFERENCES AND WRITTEN DIMENSIONS SHALL SUPERCEDE ALL SCALED DISTANCES AND SHALL BE VERIFIED IN THE FIELD. ANY DISCREPANCY SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER PRIOR TO THE COMMENCEMENT OF WORK.

NATHAN B. BRAY, P.E.
INTERIM DEVELOPMENT SERVICES
DIRECTOR/CITY ENGINEER
4-19-18
PLANS APPROVAL DATE



DATE: _____



CITY OF TURLOCK
DEVELOPMENT SERVICES
ENGINEERING DIVISION
156 S. BROADWAY, STE 150
(209) 668-5520

CONSTRUCTION PLAN 2
CAPITAL PROJECT NO. 18-28
2018 SB-1 ROAD MAINTENANCE
AND REHABILITATION SLURRY SEAL

VERIFY SCALE
BAR IS 1" ON ORIGINAL DRAWING
1/4" 3/4" 1"
0 1/2"
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

DRAWN BY: AZ
REV. BY: AH
CH. BY: NB
DATE: MARCH, 2018
SCALE: NONE
18-28 BASE.dwg

SHEET
03
OF 06

TOTAL QUANTITIES

STREET NAME	SLURRY SEAL (S.Y.)	STOP BAR & LEGEND	DETAIL 23 (L.F.)	TYPE BB MARKERS	SIGN R1-1
AHERN CT.	1,113	0	0	0	0
BUTTON CT.	1,083	0	0	0	0
PERNET CT.	1,384	1	48	1	1
KALLAND CT.	2,073	1	48	1	1
CALLISTO LN.	1,172	2	96	0	0
BARDINI WAY	7,819	2	96	4	0
HEARTLAND WY.	10,131	2	96	5	0
ROSENTHAL DR.	4,523	0	0	3	0
AVATAR CT.	998	0	0	0	0
ANDINO CT.	1,236	0	0	1	0
PUTNAM	1,466	0	0	1	0
TOTAL	32,996	8	384	16	2



NOTES:

- CONTRACTOR TO MATCH PROPOSED SLURRY SEAL LIMITS TO EXISTING SLURRY SEAL LIMITS. SHADED AREAS TO BE SEALED ARE DIAGRAMMATIC ONLY. SLURRY SEAL SHALL BE PLACED BETWEEN THE LIP OF GUTTERS, ENTIRE CUL-DE-SAC AND SHALL END AT CURB RETURNS, UNLESS OTHERWISE NOTED.
- CONTRACTOR TO INSTALL BLUE FIRE HYDRANT PAVEMENT MARKERS (TYPE BB) PER CITY STANDARDS, DWG. NO. W-3
- STRIPING AND PAVEMENT MARKINGS SHALL BE PER THE CURRENT EDITION OF THE STATE OF CALIFORNIA, DEPARTMENT OF TRANSPORTATION STANDARD PLANS.

LIMIT LINE (STOP LINE)(1'-0") AND "STOP" (A=22 S.F.) PAVEMENT MARKING WORD SHALL BE PLACED PER DETAIL, SEE SHEET 03.

REVISIONS

REV NO.	REV DATE	BY	DESCRIPTION
1	5/8/18	AH	UPDATED SLURRY SEAL QUANTITIES



NOTE:
ALL REFERENCES AND WRITTEN DIMENSIONS SHALL SUPERCEDE ALL SCALED DISTANCES AND SHALL BE VERIFIED IN THE FIELD. ANY DISCREPANCY SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER PRIOR TO THE COMMENCEMENT OF WORK.

NATHAN B. BRAY, P.E.
INTERIM DEVELOPMENT SERVICES
DIRECTOR/CITY ENGINEER
4-19-18
PLANS APPROVAL DATE



DATE: _____



CITY OF TURLOCK
DEVELOPMENT SERVICES
ENGINEERING DIVISION
156 S. BROADWAY, STE 150
(209) 668-5520

CONSTRUCTION PLAN 3
CAPITAL PROJECT NO. 18-28
2018 SB-1 ROAD MAINTENANCE
AND REHABILITATION SLURRY SEAL

VERIFY SCALE
BAR IS 1" ON ORIGINAL DRAWING
0 1/4" 3/4" 1"
1/2"
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

DRAWN BY: AZ
REV. BY: AH
CH. BY: NB
DATE: MARCH, 2018
SCALE: NONE
18-28 BASE.dwg

SHEET

04
OF 06

N OLIVE AVE

APPLE BLOSSOM LN

PINE VALLEY CT

WHISPERING PINES DR

MILANO WAY

CEDAR RIDGE DR

COLORADO AVE

CEDAR RIDGE DR

MILANO CT

TOTAL QUANTITIES

NOTES:

1. CONTRACTOR TO MATCH PROPOSED SLURRY SEAL LIMITS TO EXISTING SLURRY SEAL LIMITS. SHADED AREAS TO BE SEALED ARE DIAGRAMMATIC ONLY. SLURRY SEAL SHALL BE PLACED BETWEEN THE LIP OF GUTTERS, ENTIRE CUL-DE-SAC AND SHALL END AT CURB RETURNS, UNLESS OTHERWISE NOTED.
2. CONTRACTOR TO INSTALL BLUE FIRE HYDRANT PAVEMENT MARKERS (TYPE BB) PER CITY STANDARDS, DWG. NO. W-3
3. STRIPING AND PAVEMENT MARKINGS SHALL BE PER THE CURRENT EDITION OF THE STATE OF CALIFORNIA, DEPARTMENT OF TRANSPORTATION STANDARD PLANS.

LIMIT LINE (STOP LINE)(1'-0") AND "STOP" (A=22 S.F.) PAVEMENT MARKING WORD SHALL BE PLACED PER DETAIL, SEE SHEET 03.

STREET NAME	SLURRY SEAL (S.Y.)	STOP BAR & LEGEND	DETAIL 23 (L.F.)	TYPE BB MARKERS	SIGN R1-1
CEDAR RIDGE DR.	8,734	2	96	4	0
MILANO WAY	1,706	0	0	0	0
MILANO CT.	1,172	0	0	1	0
WHISPERING PINES DR.	5,058	0	0	3	0
PINE VALLEY CT.	1,457	0	0	0	0
APPLE BLOSSOM LN.	2,884	0	0	1	0
TOTAL	21,011	2	96	9	0




REVISIONS

REV NO.	REV DATE	BY	DESCRIPTION
1	5/8/18	AH	UPDATED SLURRY SEAL QUANTITIES



NOTE:
ALL REFERENCES AND WRITTEN
DIMENSIONS SHALL SUPERCEDE
ALL SCALED DISTANCES AND
SHALL BE VERIFIED IN THE
FIELD. ANY DISCREPANCY SHALL
BE BROUGHT TO THE ATTENTION
OF THE ENGINEER PRIOR TO
THE COMMENCEMENT OF WORK.

NATHAN B. BRAY, P.E.
INTERIM DEVELOPMENT SERVICES
DIRECTOR/CITY ENGINEER
4-19-18
PLANS APPROVAL DATE



DATE: _____



CITY OF TURLOCK
DEVELOPMENT SERVICES
ENGINEERING DIVISION
156 S. BROADWAY, STE 150
(209) 668-5520

CONSTRUCTION PLAN 4
CAPITAL PROJECT NO. 18-28
2018 SB-1 ROAD MAINTENANCE
AND REHABILITATION SLURRY SEAL

VERIFY SCALE
BAR IS 1" ON
ORIGINAL DRAWING
0 1/4" 3/4" 1"
1/2"
IF NOT ONE INCH ON
THIS SHEET, ADJUST
SCALES ACCORDINGLY

DRAWN BY: AZ
REV. BY: AH
CH. BY: NB
DATE: MARCH, 2018
SCALE: NONE
18-28 BASE.dwg

SHEET

05
OF 06



TOTAL QUANTITIES						
STREET NAME	SLURRY SEAL (S.Y.)	STOP BAR & LEGEND	DETAIL 23 (L.F.)	DETAIL 10 (L.F.)	TYPE BB MARKERS	SIGN R1-1
VENTURE LN.	15,220	2	96	1,752	7	0
ATLANTA CT.	5,293	2	96	0	2	0
ELLERD DR.	4,341	1	48	0	2	0
TOTAL	24,854	5	240	1,752	11	0



- NOTES:
- CONTRACTOR TO MATCH PROPOSED SLURRY SEAL LIMITS TO EXISTING SLURRY SEAL LIMITS. SHADED AREAS TO BE SEALED ARE DIAGRAMMATIC ONLY. SLURRY SEAL SHALL BE PLACED BETWEEN THE LIP OF GUTTERS, ENTIRE CUL-DE-SAC AND SHALL END AT CURB RETURNS, UNLESS OTHERWISE NOTED.
 - CONTRACTOR TO INSTALL BLUE FIRE HYDRANT PAVEMENT MARKERS (TYPE BB) PER CITY STANDARDS, DWG. NO. W-3
 - STRIPING AND PAVEMENT MARKINGS SHALL BE PER THE CURRENT EDITION OF THE STATE OF CALIFORNIA, DEPARTMENT OF TRANSPORTATION STANDARD PLANS.
- LIMIT LINE (STOP LINE)(1'-0") AND "STOP" (A=22 S.F.) PAVEMENT MARKING WORD SHALL BE PLACED PER DETAIL, SEE SHEET 03.

REVISIONS			
REV NO.	REV DATE	BY	DESCRIPTION
1	5/8/18	AH	UPDATED SLURRY SEAL QUANTITIES



NOTE:
ALL REFERENCES AND WRITTEN DIMENSIONS SHALL SUPERCEDE ALL SCALED DISTANCES AND SHALL BE VERIFIED IN THE FIELD. ANY DISCREPANCY SHALL BE BROUGHT TO THE ATTENTION OF THE ENGINEER PRIOR TO THE COMMENCEMENT OF WORK.

NATHAN B. BRAY, P.E.
INTERIM DEVELOPMENT SERVICES
DIRECTOR/CITY ENGINEER
4-19-18
PLANS APPROVAL DATE



DATE: _____



CITY OF TURLOCK
DEVELOPMENT SERVICES
ENGINEERING DIVISION
156 S. BROADWAY, STE 150
(209) 668-5520

CONSTRUCTION PLAN 5
CAPITAL PROJECT NO. 18-28
2018 SB-1 ROAD MAINTENANCE
AND REHABILITATION SLURRY SEAL

VERIFY SCALE
BAR IS 1" ON ORIGINAL DRAWING
0 1/4" 3/4" 1"
1/2"
IF NOT ONE INCH ON THIS SHEET, ADJUST SCALES ACCORDINGLY

DRAWN BY: AZ
REV. BY: AH
CH. BY: NB
DATE: MARCH, 2018
SCALE: NONE
18-28 BASE.dwg

SHEET
06
OF 06

BIDDER'S FORM

PROJECT TITLE: 2018 SB-1 Road Maintenance and Rehabilitation Slurry Seal

PROJECT NUMBER: 18-28

OPENING DATE: Tuesday, May 15, 2018

OPENING TIME: 2:00 PM

Item No.	Item Description	Unit of Measure	Estimated Quantity	Unit Price	Total
1	Mobilization and Demobilization	LS	1		
2	Remove Existing Improvements	LS	1		
3	Temporary Traffic Control	LS	1		
4	Temporary Striping and Markings	LS	1		
5	Slurry Seal (Type II)	SY	122,129		
6	Pavement Striping (Detail 23)	LF	1,616		
7	Pavement Striping (Detail 10)	LF	1,752		
8	Stop Bar and Legend	EA	22		
9	Pavement Marker (Type BB)	EA	56		
10	Roadside Sign (R1-1)	EA	3		
Subtotal					

Bidder has examined and carefully studied the Bidding documents and other related data identified in the Bidding Documents and the following Addenda, receipt of which is hereby acknowledged

ADDENDA

No. _____	Date _____	Signed _____
No. _____	Date _____	Signed _____
No. _____	Date _____	Signed _____
No. _____	Date _____	Signed _____
No. _____	Date _____	Signed _____

TOTAL BID WRITTEN IN FIGURES: \$ _____, _____, _____ . _____

TOTAL BID WRITTEN IN WORDS: _____

CONTRACTOR: _____